


UHD370X

Lights on viewing 4K Ultra HD projector







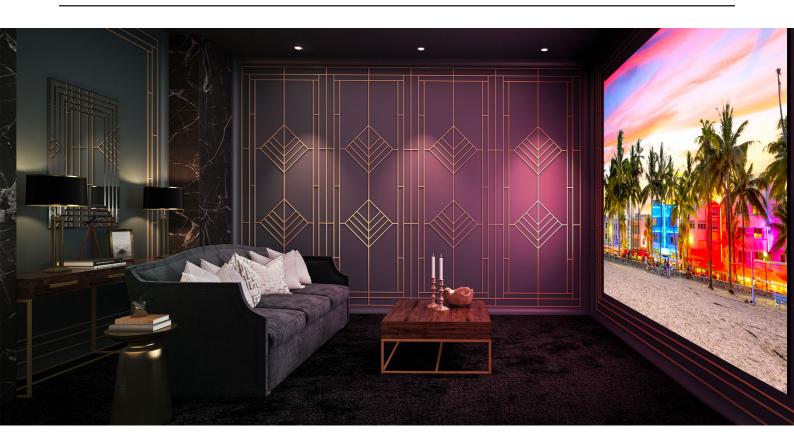

- 4K UHD resolution and HDR compatible
- Lights on viewing 3500 ANSI lumens
- Amazing colour accurate Rec.709 colours
- Built-in media player and PureMotion

Immerse yourself in a world of Ultra HD. The UHD370X delivers the ultimate in home entertainment with bright 4K images. You can now enjoy accurate colours, crystal clear detail, and sparkling contrast for a stunningly immersive experience.



Specifications

Remote control Speaker count Watts per speaker

Optional wireless models

Power consumption (min) Power consumption (max)

Weight and dimensions

In the box

Power

Power supply

Net weight Dimensions (W x D x H)

mm

Power consumption (standby)

Display/image Display technology DIP Resolution UHD (3840x2160) Brightness 3,500 lumens Contrast ratio 500,000:1 16:9 Native aspect ratio Aspect ratio - compatible 4:3 Horizontal scan rate 31 ~ 135Khz Vertical scan rate 24 ~ 120Hz 75% Uniformity 0.87m ~ 7.68m (34.1" ~ 302.4") diagonal Screen size Lamp info Light source type 240 Lamp watts 4000 (Bright), 15000 (Dynamic), 10000 (Eco) Lamp life hours (up to) Optical Throw ratio 1.21:1 ~ 1.59:1 Projection distance (m) 1.2m - 8.1m Zoom 1.3 Zoom type Manual 12.81 ~ 16.74 Focal length (mm) Lens shift Vertical +10% Native offset Connectivity Connections Inputs 2 x HDMI 2.0, 1 x VGA (YPbPr/RGB), 1 x Audio Outputs 1 x Audio 3.5mm, 1 x S/PDIF, 1 x USB-A power $\textbf{Control} \ 1 \times \text{USB-A service}, \ 1 \times \text{RS232}, \ 1 \times \text{RJ45}, \ 1 \times 12 \text{V} \\ \text{trigger}, \ 2 \times \text{USB-A reader/wireless}$ General Noise level (typical) 25dB Noise level (max) 27dB PC compatibility UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mad 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 2D compatibility 1080p(50/60Hz), 2160p(50/60Hz) 3D compatibility Side-by-Side:1080i50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-Under: 1080p24, 720p50 / 60 3D Full 3D Security Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese OSD / display languages Portuguese, Russian, Chinese (simplified), Spanish Operating conditions 5°C ~ 40°C, Max. Humidity 85%, Max. Altitude 3000m

Backlit home remote

100 ~ 240V, 50 ~ 60Hz

5W

Lens cap AC power cord Remote control 2x AAA batteries Basic user manual

WUSB

0.5W

249W

305W

5.22kg

392 x 281 x 118



