optomaeurope.com

ZU725T

Ultra bright professional installation laser projector

At 7800 lumens with 4K and HDR compatibility, the ZU725T features a dust-resistant IP5X certified optical engine for 24/7 operation

7800 lumen DuraCore laser projector - Ultra bright

Full motorized lens shift - Ideal for a simple set-up

Large zoom range - Motorized zoom expands

• Long life - Delivers 30,000 hours of virtually

for immersive installations

placement opportunities


maintenance-free operation

.

•

capabilities, offering true maintenance-free projection for up to 30,000 hours of powerful performance in Eco mode. Other features include motorized zoom and focus, full motorized lens shift and built-in dual 10W speakers.

High brightness, color precision and quiet operation, alongside a 1.6x zoom make this projector the ideal solution for a variety of end-user scenarios and professional environments, such as simulation, edge-blending and projection mapping, and immersive installations.

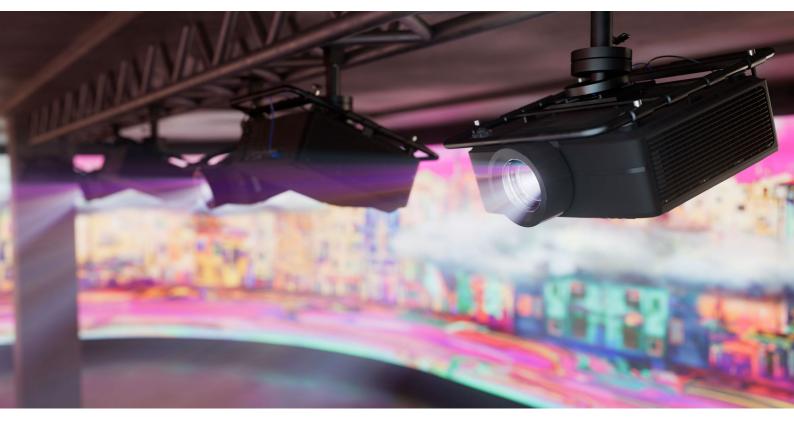



Full HC

WUXG



Specifications

UPC: 796435 44 656 7, EAN: 50)55387666955, Colour: Black
Display/image	
Display technology	DLP
Resolution	WUXGA (1920x1200)
Brightness	7,800 lumens
ANSI brightness	6,500
Contrast ratio	3,000,000:1
Contrast ratio - full on/off	1,100:1
Native aspect ratio	16:10
Aspect ratio - compatible	4:3,16:9,16:10
Keystone correction -	30°
norizontal	
Keystone correction - vertical	30°
Uniformity	95%
Screen size	1.27m ~ 7.62m (50" ~ 300") diagonal
Lamp info	
Light source type	DuraCore Laser
ASER life	30,000 hours
Optical	
Throw ratio	1.25:1 ~ 2:1
Projection distance (m)	1.33m - 13.06m
Zoom	1.6
Zoom type	Motorised
Focal length (mm)	18.72~29.59
Lens shift	Vertical: +/-55%, Horizontal: +/-25%
_ens shift	Yes - {{downloads_link}}
Connectivity	
Connections	Inputs 1 x HDBaseT, 1 x HDMI 2.0, 1 x HDMI 1.4a 3D
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A,
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x
General	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No
General Noise level (typical)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB
General Noise level (typical) Noise level (max)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB
General Noise level (typical) Noise level (max)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB
General Noise level (typical) Noise level (max) 3D	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB
General Noise level (typical) Noise level (max) 3D Security	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese,
General Noise level (typical) Noise level (max) 3D Security OSD / display languages	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional)
General Noise level (typical) Noise level (max) 3D Security DSD / display languages 24/7 operation	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes
General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes
General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation Remote control	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote
General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation Remote control Speaker count	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2
General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation Remote control Speaker count	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote
General Noise level (typical) Noise level (max) SD Security DSD / display languages 24/7 operation 360° operation Remote control Speaker count Watts per speaker Networking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2
General Joise level (typical) Joise level (max) JD JD Security DSD / display languages 4/7 operation G0° operation Remote control Speaker count Vatts per speaker Jetworking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2
General Joise level (typical) Joise level (max) JD Security JSD / display languages 24/7 operation 60° operation Remote control Speaker count Vatts per speaker Vetworking AN - wireless networking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W
General Joise level (typical) Joise level (max) JD Security JSD / display languages 24/7 operation 60° operation Remote control Speaker count Vatts per speaker Vetworking AN - wireless networking AN	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W
General Joise level (typical) Joise level (max) JD Security DSD / display languages 24/7 operation 80° operation 80exer count Speaker count Vatts per speaker Vetworking AN - wireless networking AN	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W
General Noise level (typical) Noise level (max) DD Security OSD / display languages 24/7 operation 360° operation Remote control Speaker count Watts per speaker Vetworking _AN - wireless networking _AN Power Power supply	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2 10W No Yes
General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation Remote control Speaker count Watts per speaker Vetworking _AN Power Power supply Power consumption (standby)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input
LAN - wireless networking General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation Remote control Speaker count Watts per speaker Networking LAN - wireless networking LAN - wireless networking CAN - wireless networking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input 0.5W
General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation Remote control Speaker count Watts per speaker Vetworking _AN - wireless networking _AN - Power Power consumption (standby) Power consumption (min)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input 0.5W 260W
General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation Remote control Speaker count Watts per speaker Networking AN - wireless networking AN - wireless networking AN - wireless networking Ower supply Power consumption (standby) Power consumption (max) Power consumption (max)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input 0.5W 260W
General Noise level (typical) Noise level (max) 3D Security OSD / display languages 24/7 operation 360° operation Remote control Speaker count Watts per speaker Networking _AN - Power Networking _AN - Power consumption (standby) Power consumption (max)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input 0.5W 260W 520W







Copyright © 2023, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 20092020303138