


GT1070Xe

Bright short throw home entertainment projector, great for sports



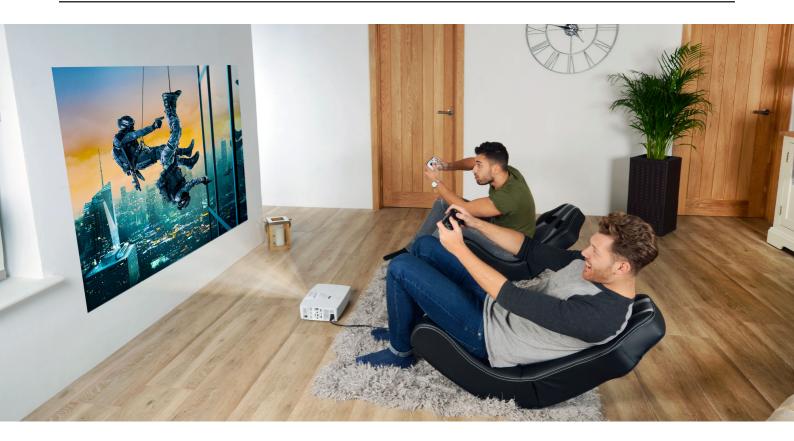

- Create a 100" Full HD 1080p image from just over a metre away
- Bright 2800 ANSI Lumens
- Easy connectivity 2x HDMI and MHL support with built-in 10W speaker
- Lightweight and portable (carry bag included)

Place your GT1070Xe on a coffee table and conveniently project a stunning 100 inch Full HD 1080p image from just over a metre from a flat surface or screen. Bright and versatile this portable projector is ideal for gamers with its low input latency, live sports and home entertainment any time of day. It even comes with a carry bag so you can take it round to a friend's house for a sports event, movie night or games marathon to provide you with the best big screen experience anywhere with a flat surface.



Specifications

Display/image	
Display technology	DLPTM
Resolution	1080p Full HD (1920x1080)
Brightness	2.800 lumens
Contrast ratio	23.000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Keystone correction - vertical	+/-40°
Horizontal scan rate	15.375 ~ 91.146Khz
/ertical scan rate	24 ~ 85(120 for 3D)Hz
Jniformity	80%
Screen size	1.15m ~ 7.62m (45.3" ~ 300") diagonal
.amp info	
light source type	Lamp
_amp watts	190
amp life hours (up to)	5000 (Bright), 6500 (Dynamic), 6000 (Eco)
Dptical	- (- () (4) (-) (2) (4) (4) (400 (mod)
Throw ratio	0.49:1
Projection distance (m)	0.5m - 3.35m
Zoom type	Fixed
Focal length (mm)	7.42
Native offset	116%
Connectivity	
Connections	Inputs 1 x HDMI 1.4a 3D support + MHL, 1 x HDMI 1.4a
	3D support
	Outputs 1 x Audio 3.5mm
	Control 1 x 3D sync, 1 x 12V trigger, 1 x mini USB service
ieneral	
loise level (typical)	26dB
loise level (typical)	28dB
C compatibility	FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
D compatibility	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)
3D compatibility	Side-by-Side:1080i50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-Under: 1080p24, 720p50 / 60
3D	Full 3D
Security	Security bar, Kensington Lock, Password protected interface
OSD / display languages	25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese
Operating conditions	5°C ~ 40°C, Max. Humidity 85%, Max. Altitude 3000m
Remote control	Backlit home remote
Speaker count	1
Vatts per speaker	10W
n the box	AC power cord
	Remote control
	2x AAA batteries Basic user manual
nput log	Basic user manual
nput lag	33.00ms
Optional wireless models	WHD200
ower	
Power supply	100 ~ 240V, 50 ~ 60Hz
Power consumption standby)	0.5W
ower consumption (min)	193W
Power consumption (max)	233W
Weight and dimensions Dimensions (W x D x H)	315 x 224 x 114
mm Gross weight Net weight	3.55 kg 3.02 kg





Copyright © 2021, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 02072021103114