


GT1070Xe

Bright short throw home entertainment projector, great for sports







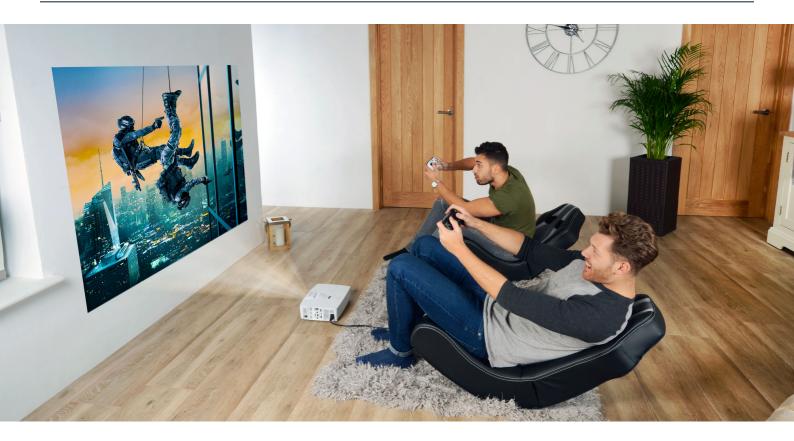

- Create a 100" Full HD 1080p image from just over a metre away
- Bright 2800 ANSI Lumens
- Easy connectivity 2x HDMI and MHL support with built-in 10W speaker
- Lightweight and portable (carry bag included)

Place your GT1070Xe on a coffee table and conveniently project a stunning 100 inch Full HD 1080p image from just over a metre from a flat surface or screen. Bright and versatile this portable projector is ideal for gamers with its low input latency, live sports and home entertainment any time of day. It even comes with a carry bag so you can take it round





Specifications

EAN: 5055387638846, Colour: Whire

Display/image
Display technology

DI P™

Resolution 1080p Full HD (1920x1080)

 Brightness
 2,800 lumens

 Contrast ratio
 23,000:1

 Native aspect ratio
 16:9

 Aspect ratio - compatible
 4:3

 Keystone correction - vertical
 +/-40°

 Horizontal scan rate
 15.375 ~ 91.146Khz

 Vertical scan rate
 24 ~ 85(120 for 3D)Hz

Uniformity 80%

Screen size 1.15m ~ 7.62m (45.3" ~ 300") diagonal

Lamp info
Light source type Lamp
Lamp watts 190

Lamp life hours (up to) 5000 (Bright), 6500 (Dynamic), 6000 (Eco)

 Optical
 0.49:1

 Projection distance (m)
 0.5m - 3.35m

 Zoom type
 Fixed

 Focal length (mm)
 7.42

 Native offset
 116%

Connectivity

Connections Inputs 1 x HDMI 1.4a 3D support + MHL, 1 x HDMI 1.4a 3D

support

Outputs 1 x Audio 3.5mm

Control 1 x 3D sync, 1 x 12V trigger, 1 x mini USB service

 General
 26dB

 Noise level (typical)
 26dB

 Noise level (max)
 28dB

 PC compatibility
 FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac

 2D compatibility
 NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H//M/N, 4,43MHz

SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) 3ide-by-Side:1080i50 / 60, 720p50 / 60 Frame-pack:

3D compatibility Side-by-Side:1080i50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-Under: 1080p24, 720p50 / 60

3D Full 3D

 Security
 Security bar, Kensington Lock, Password protected interface

 OSD / display languages
 25 languages: Arabic, Ozech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian,

Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional),

Turkish, Vietnamese

Operating conditions $5^{\circ}\text{C} \sim 40^{\circ}\text{C}$, Max. Humidity 85%, Max. Altitude 3000m

Remote control Backlit home remote

 Speaker count
 1

 Watts per speaker
 10W

 In the box
 AC power cort

 Bemote control
 Remote control

Remote control 2x AAA batteries Basic user manual 33.00ms

Input lag33.00msOptional wireless modelsWHD200

 Power

 Power supply
 100 ~ 240V, 50 ~ 60Hz

 Power consumption (standby)
 0.5W

 Power consumption (min)
 193W

 Power consumption (max)
 233W

Weight and dimensions

 Dimensions (W x D x H) mm
 315 x 224 x 114

 Gross weight
 3.55 kg

 Net weight
 3.02 kg





